OceanLED Marine
Product Support

EYES GEN2 PAL / NTSC INSTALL GUIDE

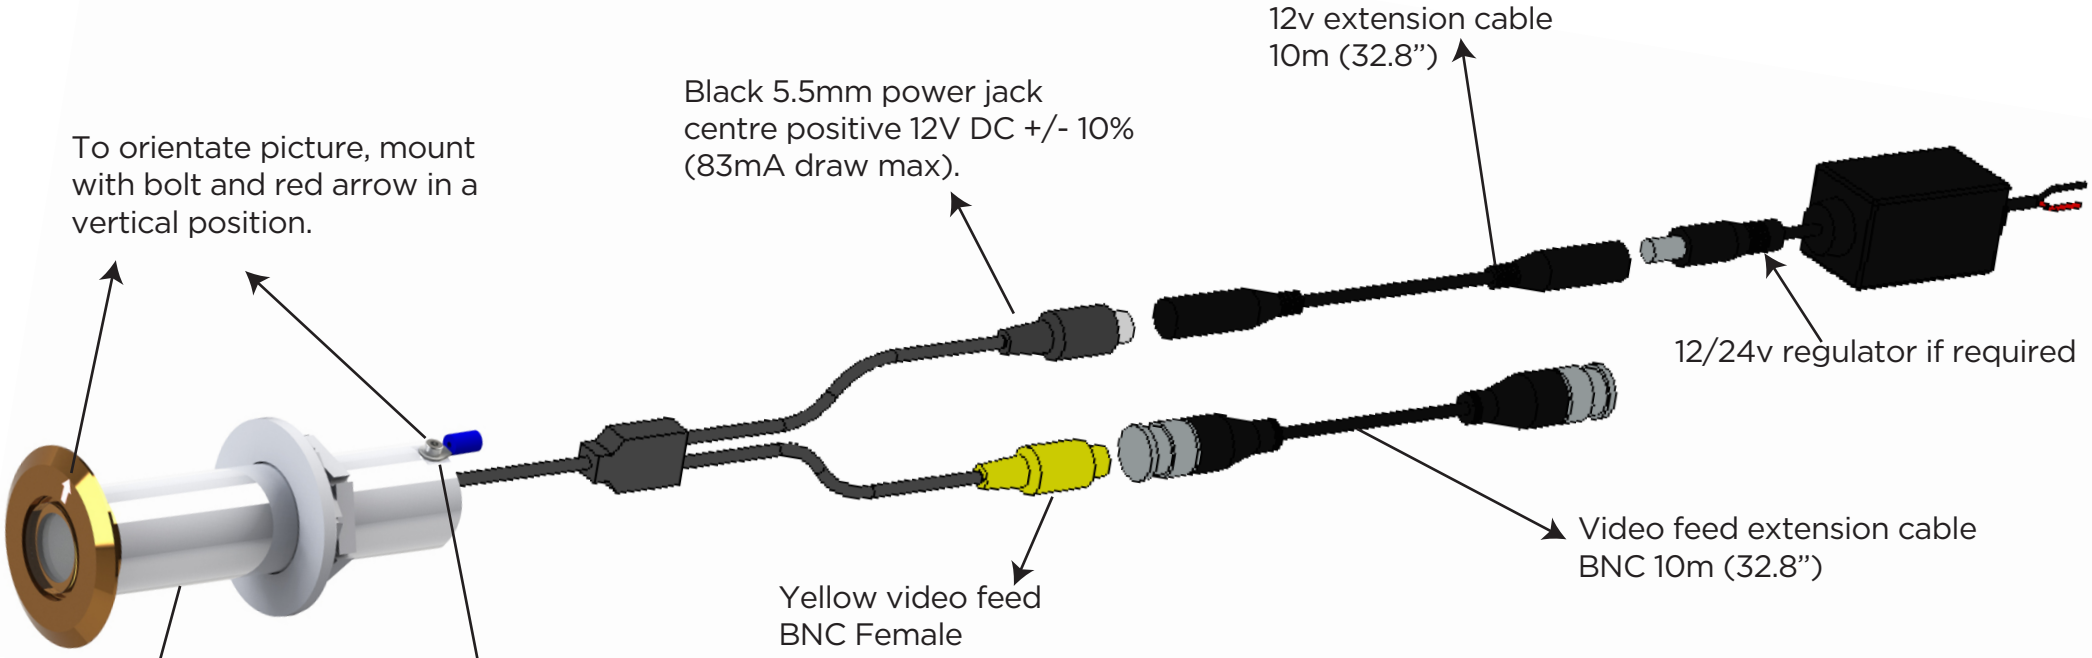

PLEASE ENSURE CONNECTIONS ARE MADE AND MAINTAINED IN A WATERPROOF ENVIRONMENT

Drill Ø34mm (1 5/16”) hole in suitable position. Apply marine sealant to this face and back of bronze flange.

Earth bonding point.
(Ensure vessels earthing system is connected to this earth bonding point).