



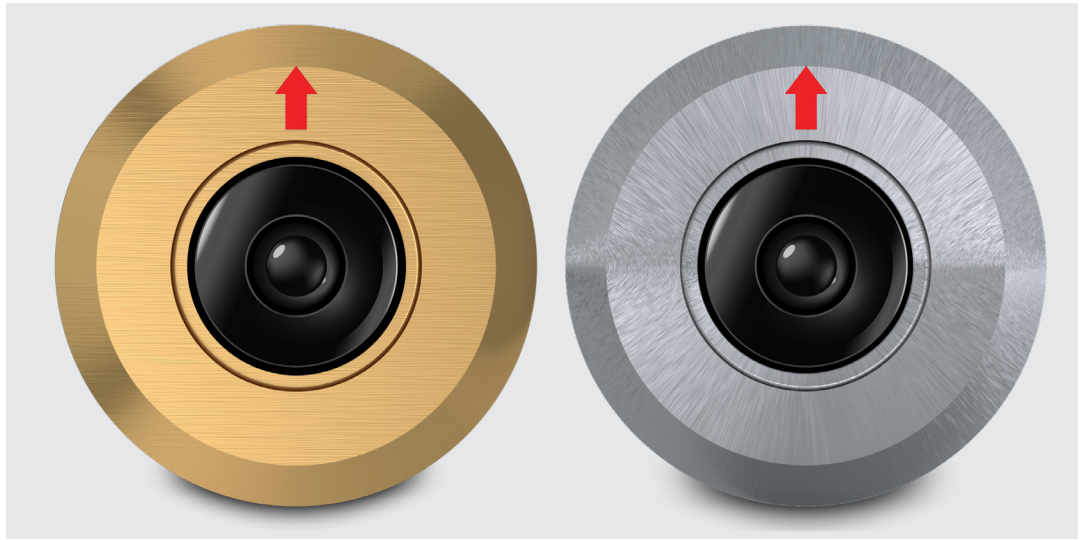

HD GEN 2 EYES SERIES

PAL (UK, EU, ROW)

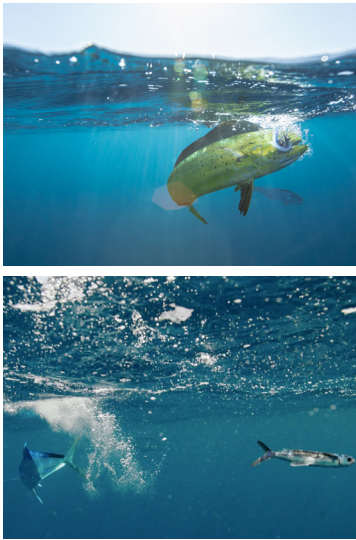

View your own underwater aquarium in high definition.

KEY FEATURES



High Definition 1080p



HD-SDI Output



2.1 Megapixel

BEZEL PART#



HD Gen2 PAL Stainless Steel **011806**



HD Gen2 PAL Alu Bronze **011803**

Never miss the moment the fish strikes or when you're lucky enough to have a pod of dolphins swimming with you. Cockpit mounting means you get a different view of the event and can provide evidence of your winning catch.

The new EYES HD Ocean Camera can be mounted anywhere allowing you to capture the magic of your own underwater aquarium beneath your boat in full 1080p High Definition video.

Can be added to a CCTV system to increase security.

Suitable for Fibreglass, GRP and wooden hulls, and also suitable for aluminium/steel hulls using the Delrin Isolation Sleeve accessory. Tritonium™ optical lens is scratch and sea growth resistant.

- Allows user to view activity / fishing action under vessel in high definition. Helps anglers see potential catches / the ones that got away.
- Provides evidence of the catch.

FULL 1080P HIGH DEFINITION

Capture the magic of your own underwater aquarium beneath your boat in full 1080p High Definition video. With 1984 x1105 pixels the Eyes HD catches more of the action in high definition.

COMPACT AND SIMPLE DESIGN

Aluminium Hard Anodized Body; Aluminium Bronze AB2 Bezel or Stainless Steel Bezel

SIMPLE TO INSTALL

35mm hole in the hull.

EASY TO CLEAN

Thanks to its Tritonium coating, a simple wipe of the lens removes any underwater growth, saving hours of scrubbing each time you use it.

EYES HD GEN2 PAL

BOX CONTENTS	
EYES Ocean Camera	
10m / 30' foot extension cable	
Power in plug-and-play harness	
Locking Kit	
12v DC Current Regulator	
Installation Guide	
ACCESSORIES	PART
EYES Delrin Sleeve (for metal hull installs)	001-500339
10M Extension cable for HD and NTSC	011807
20M Extension cable for HD and NTSC	011808
HDSDI to HDMI Converter	011809
MOUNTING RECOMMENDATIONS	
Maximum hull thickness	62.5mm (2.5")
TECHNICAL	
Minimum Illumination	0.1 LUX
Minimum-Maximum operating voltage DC	9-14V DC
Current / Amp draw (DC)	12V DC 110mA MAX
Effective Pixels	1984 (H) x 1105 (v)
H. Resolution	1080 TV Lines
Video Output	HD-SDI @ 30fps
S/N Ratio	More than 50dB
Minimum Exposure Time	1/60,000sec
Lens	3.7mm
Operating Temperature	14°F-122°F (-10°C-+50°C)
PHYSICAL	
Total weight	65g (2.3oz)
Extension cable length (standard)	10m (30')
Hole cut-out for cable entry	35mm (1.38")
Material	Aluminium Hard Anodized Body; Aluminium Bronze AB2 / Steel Bezel

